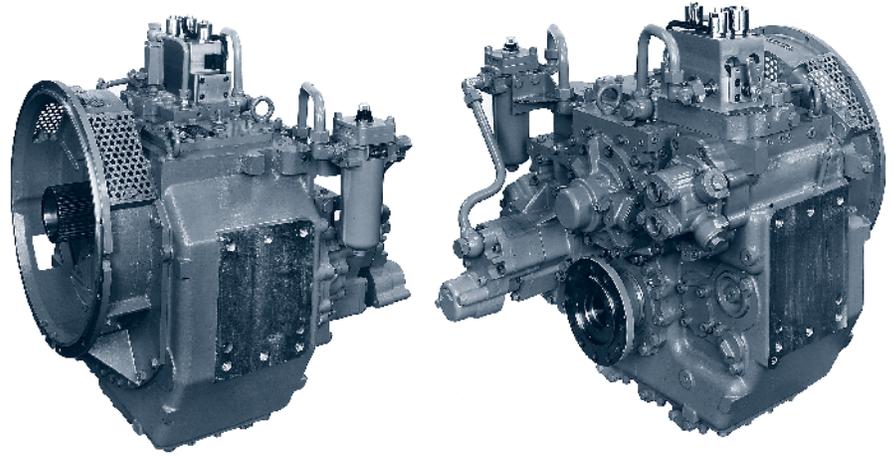


MAXIMUM 867 KW (1163 HP) @ 2100 RPM [INTERMEDIATE DUTY]**STANDARD EQUIPMENT****MG-6619 SC**

SAE no. 1 and no. 0 (alloy)
 14"/18" Torsional input couplings
 Oil strainer and oil filter
 12v or 24v electric selector valve with mechanical
 backup valve operable from control station
 Integral raw water heat exchanger

**OPTIONS**

	MG-6557 SC
Companion flange/bolt set	x
Trailing pump	x
Mounting brackets	x
Electric trolling valve	x
Oil temperature gauges with electric high temperature alarm contacts	x
PTOs	
Live SAE 'C' 4 bolt pump 112 kW (150 hp) @ 1800 rpm	x
Disconnect clutch (hydraulic type) 112 kW (150 hp) @ 1800 rpm	x
Weight (dry weight - alloy housing)	438 kg

Contact Twin Disc for Survey Society Approvals and Classifications.

Specifications subject to change without prior notice in the interest of continual product improvement.

INPUT RATINGS – KILOWATTS (KW) (HORSEPOWER [HP])*

Reduction Ratios :1	Pleasure Craft Duty		Intermediate Duty		Continuous Duty		Max rated input speed and min. engine low idle speed RPM
	@2100 RPM	@2300 RPM	@1800 RPM	@2100 RPM	@1600 RPM	@1800 RPM	
1.07, 1.33, 1.50, 1.97	1225 kW (1643 hp)	1342 kW (1800 hp)	743 kW (1490 hp)	867 kW (1163 hp)	593 kW (795 hp)	667 kW (895 hp)	2500 max. 450 min.
2.45	996 kW (1336 hp)	1091 kW (1463 hp)	617 kW (828 hp)	720 kW (965 hp)	533 kW (715 hp)	600 kW (805 hp)	
2.93	919 kW (1233 hp)	1007 kW (1350 hp)	617 kW (828 hp)	720 kW (965 hp)	533 kW (715 hp)	600 kW (805 hp)	

* Ratings shown for use with standard right hand rotation engines.

SERVICE CLASSIFICATION DEFINITIONS

Pleasure Craft [PC]: Up to 500 hours/year, low load factor usage planing hull vessels where typical full engine throttle operation is less than 10% of total time. The balance of operation at 80% of full engine throttle or less. Marine transmissions for use in long range pleasure cruisers, sportfish charter boats/patrol boats do not qualify for Pleasure Craft Service.

Note: Some revenue producing applications such as Planing Hull Bristol Bay Gillnetter do qualify under Pleasure Craft rating definition.

Light Duty [LD]: Relatively low hour usage (less than 1500 hours per year) where full throttle operation is 2 hours out of 12. Typical applications include planing hull vessels such as fire boats, sportfish charter boats, and patrol/custom boats. This rating is also applicable to some bow and stern thruster applications.

Intermediate Duty [ID]: Hour usage of up to 2000 hours/year (for models MG-5114 Series and smaller) and up to 3000 hours/year (for models larger than MG-5114 Series) with 50% of the operating time at full engine rating. Typical applications include planing hull vessels such as ferries, fishing boats, some crew boats, and some displacement hull yachts as well as some bow and stern thruster applications.

Medium Duty [MD]: Hour usage of up to 4000 hours/year with up to 80% of operating time at full engine power. This duty classification is for usage where some variations in engine speed/power occur as part of normal vessel operation. Typical vessels include mid-water trawlers, crew/supply boats, ferries, and some inland water tow boats.

Continuous Duty [CD]: For use in continuous operation with little or no variation in engine speed/power setting. Typical vessels include fishing trawlers, tow/tug boats and ocean going vessels.



Important Notice: Torsional Vibration: Disregarding propulsion system torsional compatibility could cause damage to components in the drive train resulting in loss of mobility. At minimum, system incompatibility could result in gear clatter at low speeds.

The responsibility for ensuring that the torsional compatibility of the propulsion system is satisfactory rests with the assembler of the drive and driven equipment.

Torsional vibration analysis can be made by the engine builder, marine survey societies, independent consultants and others. Twin Disc is prepared to assist in finding solutions to potential torsional problems that relate to the marine transmission.

Twin Disc, Incorporated reminds users of these products that their safe operation depends on use in compliance with engineering information provided in this bulletin. Users are also reminded that safe operation depends on proper installation, operation and routine maintenance and inspection under prevailing conditions. It is the responsibility of the user (and not Twin Disc, Incorporated) to provide and install guards or safety devices which may be required by recognized safety standards or by the Occupational Safety and Health Act of 1970 and its subsequent provision.

MG-6557 SC

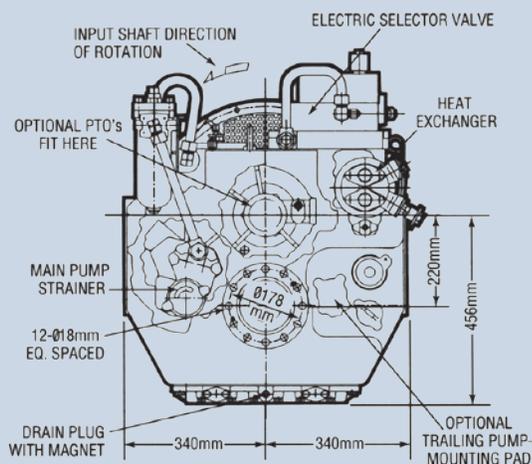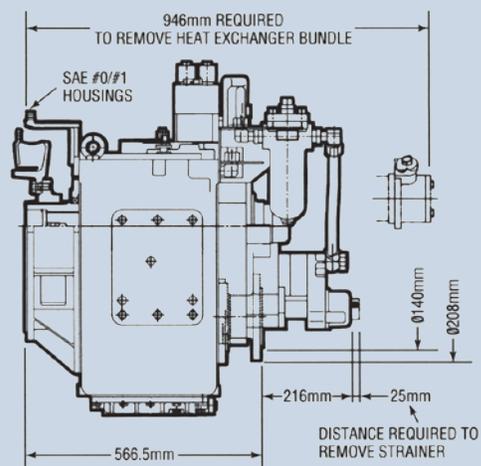

Twin Disc, Incorporated
Racine, Wisconsin 53403 U.S.A
Phone +1-262-638-4000
Fax +1-262-638-4482
www.twindisc.com